




DIP Switch Remote Control

User's Guide

Model No.: R-B04-F

Brief Introduction

DIP switch inside. Press the dial switch according to the original code table, and it can be used when the code is consistent.

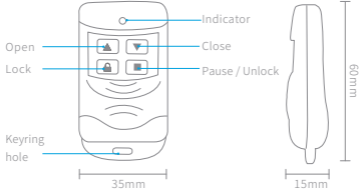

Specifications:

Product name: DIP Switch Remote Control
 Product size: 35x15x60mm
 Working voltage: 23A / 12V
 Model: R-B04-F
 Working frequency: 433Mhz/315Mhz (optional)
 Working distance: < 50m
 Applicable chips: Suitable for all fixed code chips
 Standard Packaging: Remote control (including batteries), Key ring
 Application: Various types of Rolling Shutter Door, Retractable Door, Garage Door, Gate, etc

Specifications:

1. Take off the back cover of the new DIP Switch Remote Control: Use a screw driver to open the back case, and take out the PCBA board inside. There are eight dial switches on the top. Each switch has 3 levels, which is divided into High, Medium and Low.



2. Find the code table on the back of the original remote control: Switch the dial switch according to the code table, make the 8 switches same position as the original remote control, the new remote control can be used when the code is consistent.

Diagram

+		■	■				■	
0	■	2	3	■	■	■	7	8
-								■

Left: Code Table on the Original Remote Control.



Right: Position on the New DIP Switch Remote Control

Selection Guide:

Frequency	433	430	418	390	350	315	310
Chip model	PT2260	PT2262	PT2264	PT2240	SC2260	SC2262	CS5211
	HX2260	HX2262	HS2262	EV1527	HS1527	HS2260	FP527
	HX1527	SMC918	AX5026	SMC926	Not available for Secret Code, or Hopping Code remote control		

Notice:

The following 2 points need to notice when purchasing this DIP Switch Remote Control:

- A: The crystal frequency of the old remote controller: it determines which model need to purchase;
- B: The chip model of the old remote control: it determines whether it can be paired.

Please read this manual carefully before using this product!

Shenzhen DreamLnk Technology Co., Ltd
 Office Add.: Room 603, Unit C, Zone A, Huameiju Business Center, Xinhua Rd., Bao'an District, Shenzhen, Guangdong Province, China
 TEL.: +86-755-29369047 FAX: +86-755-27844601
 Mobile: +86 13760215716 Wechat: wsj_james
 E-mail: james@dreamlnk.com Web: www.iot-rf.com